



DUAL BAND FM TRANSCEIVERS

IC-T70A HD

(Li-Ion BP-265 and BC-193)

Rugged Workhorse Radio with Powerful Audio

Impressive audio output volume, long-lasting power, plenty of memory channels, rugged construction, rich in analog features – the T70A HD offers practical 2m/70cm dual band operation and ruggedness, updated for today's ham radio enthusiasts.

700mW loud audio

The IC-T70A HD uses a BTL (bridge-tied load) amplifier that doubles the audio output. The 36mm large speaker delivers 700mW of loud and intelligible audio*. Great for noisy environments. * Using with internal speaker.

Long lasting battery life

Get 5W of power on VHF and UHF in a small, lightweight package. The lighter BP-265 Li-Ion battery pushes operation to 13.5 hours*. The optional BP-264 Ni-MH battery offers over 10 hours of power on a single charge*. And an optional AA alkaline battery case is ideal for long storage or quick back-up.

* Typical operation. 5:5:90 duty cycle with auto power save ON.

External DC power jack

An external DC power jack allows for operation and charge when used with an external DC power supply (10-16V DC).*

* The BP-265 cannot be charged using the external DC power jack.

A total of 302 memory channels

With 302 alphanumeric memory channels, including 50 band edges and 2 call channels, the IC-T70A HD gives you flexible scanning lists. With a maximum of 26 memory banks*, you can pick and choose the desired banks for scanning from the 250 memories.

* Up to 100 channels per bank.

Built-in CTCSS/DTCS

CTCSS and DTCS tone codes provide quiet stand-by and allow you to use tone-access repeaters. Pocket beep alerts you when a matching tone frequency is received. Tone scan detects the subaudible tone that is used for repeater access.

Internal VOX function

The IC-T70A HD has an internal VOX (Voice Operated Transmit) function for convenient hands-free operation when used with a compatible optional headset and plug adapter cable. Also, the VOX level and VOX delay time are adjustable.

IP54 and MIL-STD-810 rugged construction

Dust protection and water-resistance equivalent to IP54 provides reliable operation for practical outdoor operation. The IC-T70A HD tested to and passed MIL-STD-810 environmental tests.

Other features

- WX channel and WX alert function
- Power save function • SMA type antenna connector
- Automatic repeater function
- 1750Hz tone for European repeater access
- TOT (time out timer) setting
- Repeater lockout and busy channel lockout
- PC programmable with optional CS-T70
- Transceiver-to-transceiver cloning (Optional)
- Direct keypad frequency entry
- 16 DTMF autodial memories
- Auto power off • LCD backlight
- Wide/narrow channel spacing



700mW Loud and Clear Audio



IP54 Dust Protection and Water Resistance



SPECIFICATIONS

GENERAL

• Frequency coverage : (unit: MHz)

Version	Transmit	Receive
USA	144-148, 420-450*1	136-174, 400-479*1
Europe	144-146, 430-440	144-146, 430-440
UK	144-146, 430-440	136-174, 400-479*2
Export	136-174, 400-479*3	136-174, 400-479*3

Guaranteed range *1 144-148, 440-450MHz, *2 144-146, 430-440MHz, *3 144-148, 430-440MHz

- Type of emissions : F2D/F3E (FM)
- No. of memory channel: 302 (incl. 50 scan edges and 2 call)
- Operating temperature : -20°C to +60°C; -4°F to +140°F range (Radio only)
- Frequency stability : ±2.5ppm (-20°C to +60°C on the basis of 25°C)
- Power supply requirement : 7.2V DC (with BP-264)
External DC power 10-16V DC
Battery cells 6-10V DC
- Current drain (at 7.2V DC or 13.5V DC):
Tx High (VHF/UHF) 1.7A/2.1A typical
Rx Max. audio Less than 450mA (Internal SP, 16Ω)
Less than 300mA (External SP, 8Ω)
Stand-by Less than 90mA
Power save Less than 40mA (1:8 duty)

- Antenna impedance : 50Ω (SMA)
- Dimensions (W×H×D) : 58 × 111 × 30 mm; (Projections not included) 2.28 × 4.37 × 1.18 in
- Weight (approx.) : 380g; 13.4oz (with BP-264 and Ant.)

- Audio output power : More than 700mW (Internal SP, 16Ω) (at 10% distortion) More than 400mW (External SP, 8Ω)
- External speaker : 3-conductor 3.5(d) mm (1/8")/8Ω connector

TRANSMITTER

- Output power (at 7.2V) : 5.0W/2.5W/0.5W (High/mid/low)
- Max. freq. deviation : ±5.0kHz/±2.5kHz (Wide/narrow)
- Spurious emissions : Less than -60dBc (High, Mid) Less than -13dBm (Low)
- External microphone connector : 3-conductor 2.5(d)mm (1/16")/2.2kΩ

RECEIVER

- Sensitivity (at 12dB SINAD) : Guaranteed range 0.18μV typical
- Squelch sensitivity (threshold) : Guaranteed range 0.18μV typical
- Selectivity (20kHz spacing, ham band only) : FM More than 60dB
FM narrow More than 60dB
- Spurious and image rejection : More than 60dB

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810 F	
	Method	Procedure
Low Pressure	500.4	I, II
High Temperature	501.4	I, II
Low Temperature	502.4	I, II
Temperature Shock	503.4	I
Solar Radiation	505.4	I
Rain Blowing/Drip	506.4	I, III
Humidity	507.4	-
Salt Fog	509.4	-
Dust Blowing	510.4	I
Vibration	514.5	I
Shock	516.5	I, IV

Ingress Protection Standard	
Dust & Water	IP54 (Dust-protection and water resistant)

All stated specifications are subject to change without notice or obligation.

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.

BATTERY PACKS AND CASE



Battery packs	Type and capacity	Operating time* (Approx.)
BP-263	AA (LR6) batteries × 6	-
BP-264	Ni-MH, 7.2V 1400mAh	11.5 hours (VHF), 10 hours (UHF)
BP-265	Li-Ion, 7.4V 1900mAh (min.) 2000mAh (typ.)	16 hours (VHF), 13.5 hours (UHF)

* Tx: Rx: standby = 5:5:90. Power save function ON.

2-hour/2.5-hour RAPID CHARGERS



BC-191 for BP-264 Ni-MH battery
BC-193 for BP-265 Li-Ion battery HD
BC-123S*1 for use with BC-191 or BC-193

WALL CHARGER For BP-264 (Ni-MH battery)



*2 BC-167SA for 120V AC, SD for 230V AC, SV for 240V AC.

REGULAR CHARGER For BP-264 (Ni-MH battery)



*3 BC-147SA for 120V AC, SE for 230V AC, SV for 240V AC.

RAPID MULTI-CHARGER



BC-197 BC-157S

CIGARETTE LIGHTER CABLES



CP-19R*4 For operation with a 12V socket.
CP-23L For use with BC-191 or BC-193

DC POWER CABLES




OPC-254L*4 For operation with an external power supply
OPC-515L For use with BC-191, BC-192 or BC-193
OPC-656 For use with BC-197

SPEAKER-MICROPHONES



HM-153 HM-131

HEADSETS and PLUG ADAPTER CABLE

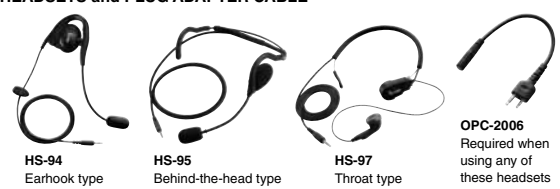

HS-94 Earhook type
HS-95 Behind-the-head type
HS-97 Throat type
OPC-2006 Required when using any of these headsets

CARRYING CASE



LC-174

- CS-T70 Cloning software
- + OPC-478/UC Cloning cable OPC-478UC is a USB cable type.
- OPC-474 Transceiver-to-transceiver cloning cable
- FA-S270C VHF/UHF ANTENNA Same as supplied.
- MB-124 Alligator type belt clip Same as supplied.
- AD-120 Charger adapter for BP-264
- AD-121 Charger adapter for BP-265
- Either AD-120 or AD-121 charger adapters are supplied with the BC-197, depending on BC-197's version.
- SP-27 Acoustic tube earphone.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia, Japan and/or other countries. All other trademarks are the properties of their respective holders.

Icom America Inc.

2380 116th Avenue NE, Bellevue, WA 98004, U.S.A. Phone: +1 (425) 454-8155 Fax: +1 (425) 454-1509

www.icomamerica.com

Count on us!

Icom Inc.

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan
Phone : +81 (06) 6793 5302
Fax : +81 (06) 6793 0013
URL : http://www.icom.co.jp/world

Icom (Europe) GmbH

Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone : +49 (6196) 76685-0
Fax : +49 (6196) 76685-50
E-mail : info@icom-europe.com
URL : http://www.icomeurope.com

Icom (UK) Ltd.

Blacksole House, Altira Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone : +44 (0) 1227 741741
Fax : +44 (0) 1227 741742
E-mail : info@icomuk.co.uk
URL : http://www.icomuk.co.uk

Icom New Zealand

146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone : +64 (09) 274 4062
Fax : +64 (09) 274 4708
E-mail : inquiries@icom.co.nz
URL : http://www.icom.co.nz

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone : +1 (604) 952-4266
Fax : +1 (604) 952-0090
E-mail : info@icomcanada.com
URL : http://www.icomcanada.com

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone : +34 (93) 590 26 70
Fax : +34 (93) 590 44 46
E-mail : icom@icomspain.com
URL : http://www.icomspain.com

Icom France s.a.s.

Zac de la Plaine,
1 Rue Brindjonnec des Moulains, BP 45804,
31505 Toulouse Cedex 5, France
Phone : +33 (5) 61 36 03 03
Fax : +33 (5) 61 36 03 00
E-mail : icom@icom-france.com
URL : http://www.icom-france.com

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone : +886 (02) 2559 1899
Fax : +886 (02) 2559 1874
E-mail : sales@asia-icom.com
URL : http://www.asia-icom.com

Icom Brazil

Rua Itororó, 444 Padre Eustáquio
Belo Horizonte MG,
CEP: 30130-150, Brazil
Phone : +55 (31) 3582 8847
Fax : +55 (31) 3582 8847
E-mail : sales@icombrasil.com

Icom Polska Sp. z o.o.

90-286 Gdansk, Jaskowa Dolina St. 75, Poland
Phone : +48 (58) 551 0484
Fax : +48 (58) 551 4720
E-mail : icompolska@icompolska.com.pl
URL : http://www.icompolska.com.pl

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone : +61 (03) 9549 7500
Fax : +61 (03) 9549 7505
E-mail : sales@icom.net.au
URL : http://www.icom.net.au

Shanghai Icom Ltd.

No.101, Building 9, Caifuxingyuan Park,
No. 168 Maoting Road, Chedun Town,
Songjiang District, Shanghai, 201611, China
Phone : +86 (021) 6153 2768
Fax : +86 (021) 5765 9987
E-mail : bjiacom@bjicom.com
URL : http://www.bjiacom.com

Your local distributor/dealer: